


Predator

- ☒ Our "State Of Art" user-friendly, easy to install, sleek and sturdy Security and Intrusion Alarm System are found to be a must in High Security Risk areas like Banks and such stern Industries.
- ☒ Auto Dialer compatibility is a Great advantage.
- ☒ Also available with Wireless Hand Remote

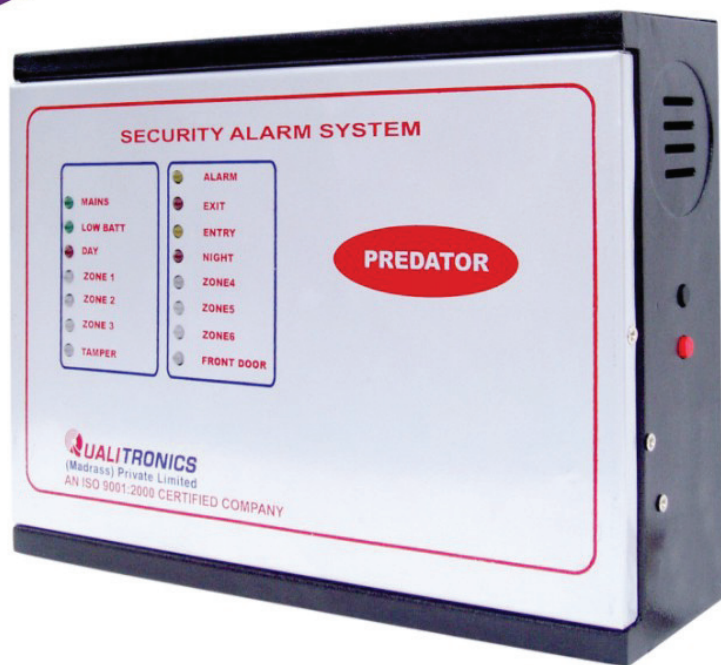

QUALITRONICS
(Madras) Private Limited
Emerging Technology Made Affordable
An ISO 9001-2000 Certified Company

Features:

- Micro Controller based technology.
- Reliable wide operating voltage SMPS suitable for any power conditions.
- Inbuilt SMF auto rechargeable Battery
- Low Battery LED indication
- User selectable day night mode of operation with Day / Night switch.
- Automatic Isolation faulty zones
- Tamper proof wiring and foolproof control system
- Auto cut off Alarm
- Auto restart after auto cut off time
- Day mode delayed alarm for 3zones.
- Night mode instant alarm for 3 zones.
- Front door delay (Entry & exit)
- Hooter tamper proof
- Ignition key for system "ON" and "OFF"
- Green LED Indications for faulty Isolated zones.
- RED LED Indications for alarming zones
- Day and Night mode LED Indications
- Emergency Switch for instant Alarm
- Beep sound on delay time and automatic zone faulty Isolation
- Common alarm LED indication
- Hand Remote Switch for panic alarm and system "ON" and "OFF" (Optional)
- Dual 40 watts Hooter output with inbuilt Speaker



Technical Specification:

Working input voltage	: 80 to 270 V AC input (SMPS)
DC operating voltage	: 12V DC
Quiescent current	: 50ma @ 12V DC
Alarm output power (DUAL)	: 40watts
Standby power	: 12V
Charging voltage	: 13.8V
Charger current	: 0.3 A
Alarm current	: 1.5 A @ 12 V DC
Auxiliary supply	: 12V x 1 Amp
Auto Dialer supply	: 12V x .25 A
Battery	: 12V x 3 AH x 1No.



NEW NO. 30 (OLD NO. 31), 18TH AVENUE, ASHOK NAGAR,
CHENNAI 600 083, TAMIL NADU.
TELEFAX: +91-44-24713888 (5Lines)
EMAIL: sales@qualitronix.com